


MSB

- Iskuvasarat Keskokokoiset & Suuret

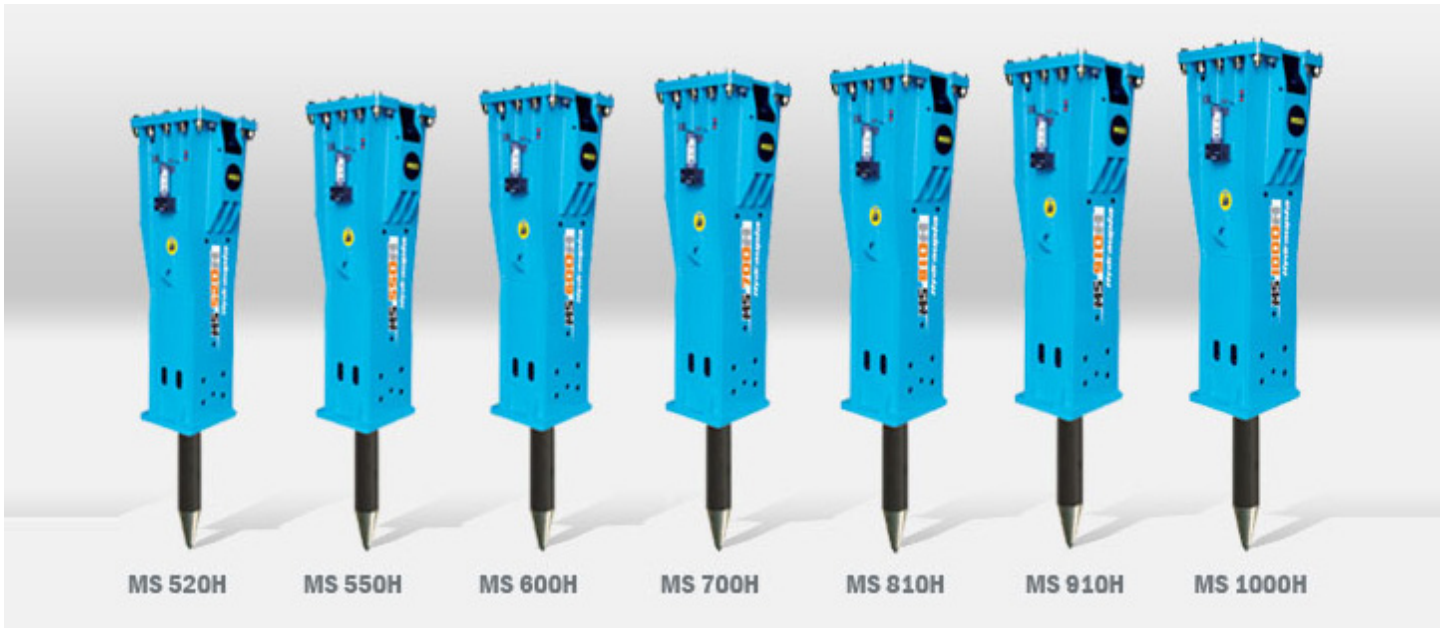

Specification	Unit	MS520H	MS550H	MS600H	MS700H	MS810H	MS910H	MS1000H
Weight	Kg	1200	1500	1734	2250	3030	3770	5600
Impact Rate	bpm	400~500	400~500	400~500	400~500	300~450	300~400	300~400
Operating Pressure	bar	120~140	120~140	120~140	130~150	130~150	130~150	130~150
Relief Pressure	bar	170~190	170~190	170~190	180~200	180~200	180~200	180~200
Oil Flow	l/min	80~100 (max 130)	110~150 (max 180)	130~150 (max 180)	170~200 (max 230)	190~220 (max 250)	210~240 (max 300)	250~305 (max 340)
Tool Diameter	mm	110	120	130	140	160	170	180
Pressure Line Size	mm(in)	19(3/4)	25(1)	25(1)	25(1)	25(1)	25(1)	32(1 1/4)
return Line Size	mm(in)	25(1)	25(1)	25(1)	32(1 1/4)	32(1 1/4)	32(1 1/4)	38(1 1/2)
Suitable Carrier Weight	ton	14~18	18~25	22~28	25~32	30~45	40~55	50~75

* Weight includes standard tool and top bracket